



## SUS304/316 Immersible Ultrasonic Transducer Box 2400W For Ultrasonic

### Basic Information

- Place of Origin: CHINA
- Brand Name: YUNYISONIC
- Certification: CE, RoHS, ISO
- Model Number: YH Series
- Minimum Order Quantity: 1set
- Price: Negotiation
- Packaging Details: packing by box or woodencase; the packing size decides by themachine
- Delivery Time: In Stock
- Payment Terms: Western Union, L/C, T/T, Paypal
- Supply Ability: 300 set spermonth




### Product Specification

- Model: YH Series
- Material: SUS 316 304 201
- Warranty: 1 Year & Life time Technical Support
- Frequency: 28/40kHz
- Purpose: Ultrasonic Cleaning
- Color: Silver
- Highlight: SUS 304 immersible ultrasonic transducer.
  1. Portability and flexibility
  2. Efficient cleaning ability
  3. Energy saving, low power consumption
  4. High security, simple operation



### More Images

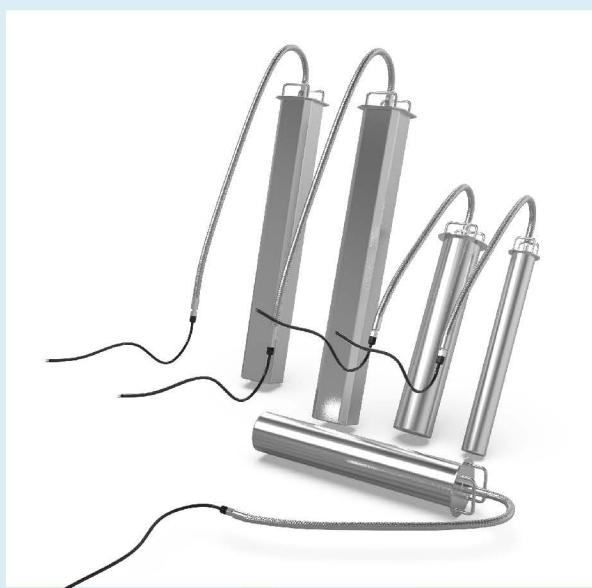

## SUS304/316 Immersible Ultrasonic Transducer Rod 600W For Ultrasonic Cleaning

Ultrasonic Transducer Box technology extraction surpasses previous technical feasibility, obtains extraction more efficiently, is more efective than thermal extraction resident facility supervision, and reduces extraction time. Most pretreated material is extracted within 10-15 minutes.

YH1265



Ultrasonic Frequency	40 kHz(Customizable)
Material	Stainless Steel SUS304
Timer	1~99min adjustable
Heater	N/A
Degas	NO
Semiwave	NO
Power Supply	AC 100~120V,50/60Hz AC 220~240V,50/60 Hz
Ultrasonic Power	<b>0-600W</b>
Transducer	<b>12 pcs</b>
Basket& cover	NO
Product Size	<b>650*51mm</b>
Max Power	<b>600W</b>
Warranty	<b>1 year</b>

1. Using high-quality high-performance transducers and unique ultrasonic generators strong cleaning power and stable performance.
2. Using high-quality stainless steel plate, acid and alkali resistance, beautiful appearance.
3. Split structure design, easy to install and use, easy to maintain, suitable for a variety of cleaning requirements.
4. Integral bending forming, straight seam double-sided protective welding, small deformation and thorough leakage prevention.
5. The shape, power lead-out method, and fixed position can be designed and customized according to needs.

Application field:Manufacture line,Electronics,  
Aerospace and marine parts,  
Machinery,Plating and Painting,Food industry Industrial,  
experimental, etc

CE/ROHS/FCC/PSE/ISO2018 9001

## How does the Ultrasonic Transducer Rod works?

The application principle of Ultrasonic Transducer Box is that the high-frequency vibration signal emitted by the ultrasonic generator is converted into high-frequency mechanical vibration through the converter and propagated into the medium. The flow of liquid creates tens of thousands of small air bubbles. Small air bubbles (cavitation nuclei) in the liquid vibrate under the action of the sound field. When the sound pressure reaches a certain value, the bubble grows rapidly and then closes quickly, making the bubble close. When the shock wave is generated, thousands of atmospheres of pressure are created around it, destroying the insoluble dirt and dispersing it in the cleaning fluid. When the group of particles is wrapped by oil and attached to the surface of the cleaning part, the oil is emulsified and the solid particles are separated, so as to achieve the purpose of cleaning the surface of the cleaning part.

Series	Ultrasonic vibration rod						
Model	YH0320	YH0635	YH0950	YH1265	YH1580	YH1895	YH21105
Frequency(Khz)	28/40	28/40	28/40	28/40	28/40	28/40	28/40
Power(W)	150W	300W	450W	600W	750W	900W	1050W
Transducers(PCS)	3	6	9	12	15	18	21
Length(mm)	200	350	500	650	800	950	1050
Diameter(mm)	60/50	60/50	60/50	60/50	60/50	60/50	60/50

### Ultrasonic Transducer rod feature:

Original BLT type transducer  
 SUS stainless steel housing hard chrome plated (20+ microns)  
 Support continuous operation  
 Adjustable ultrasonic power  
 Ultrasonic electronic generator with individual control  
 Custom sizes available  
 Transducer Number/Transducer Rod: Range [3-21 per Rod]  
 Ultrasonic output: range [150W-1050W]  
 Ultrasonic frequency: 28KHZ/40KHZ

### Features of underwater ultrasonic transducer generator:

Original BLT type transducer  
 SUS stainless steel housing hard chrome plated (20+ microns)  
 Support continuous operation  
 Sweep frequency ultrasonic generator  
 Humanized operation  
 Number of Transducers /Transducer Rod: Range [6 to 48 per Rod]  
 Transducer box size can be customized Ultrasonic output: range [150W~1050W]  
 Ultrasonic frequency: 28KHZ/40KHZ

### Ultrasonic Transducer rod Cleaning function:

1. Ensure that the underwater transducers are manufactured to individual customer specifications and adjust the size and ultrasonic output to provide cleaning and processing results.

2. These underwater transducers provide excellent ultrasonic activity and can be easily controlled by Ultrawave's advanced technology.

Easy to install


The underwater sensor can be easily installed or retrofitted to existing tanks, allowing for easy service and maintenance while utilizing an upgraded system with ultrasonic cleaning technology.

### Ultrasonic Transducer Box's hose tube


### Ultrasonic Transducer rod Package Includes:

1 x Ultrasonic Transducer Rod  
 1 x Generator  
 1 x Manual  
 Packing method: wooden case packing

## Ultrasonic Transducer rod Production sample.

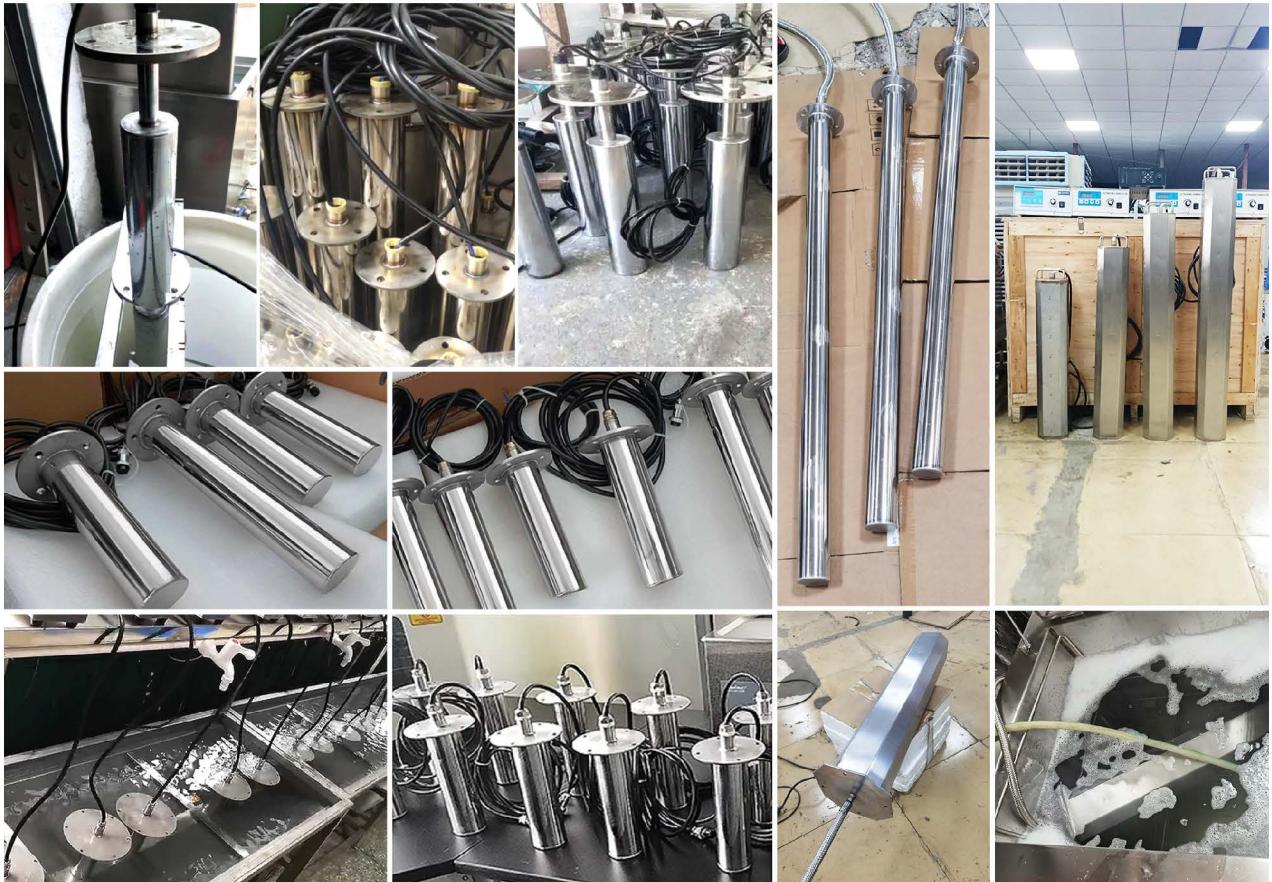

## USAGE DIAGRAM

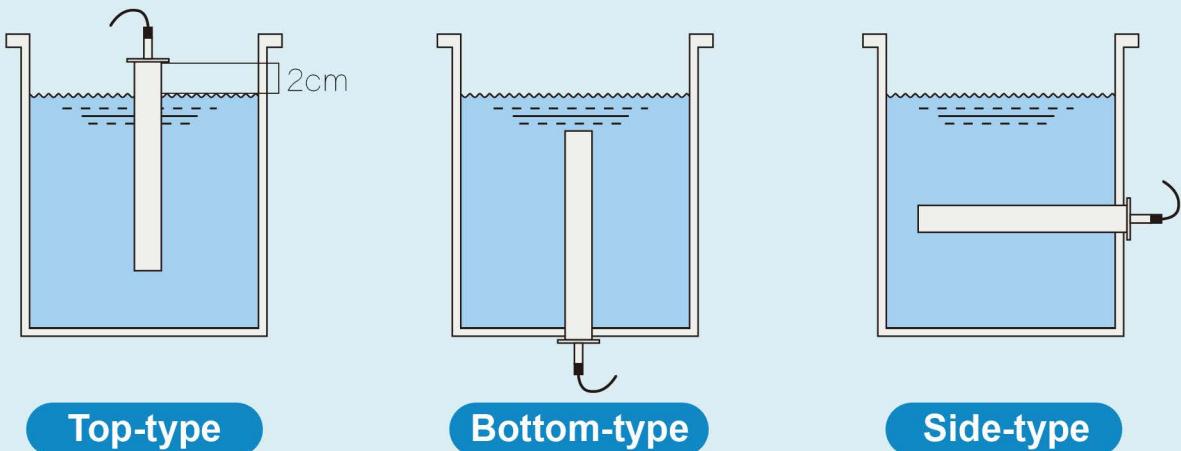

Top-type

Bottom-type

Side-type

**Note:** The ultrasonic vibration rod needs to be completely immersed in water

## Note:

1. Ultrasonic input transducer Rod can be customized including!

Material: (SUS 304 316 titanium alloy)

Power: (150-1800W)

Frequency(28/40KHz)

Power outlet mode/direction: (hose/hard pipe, direction according to customer demand)

Different needs affect costs, please confirm with sales in advance before placing orders.

## Other immersion ultrasonic cleaning rods:



Series	Immersible rhombus ultrasonic vibration rod								
Model	YHQ1230	YHQ1845	YHQ2460	YHQ3075	YHQ3690	YHQ42105	YHQ48120	YHQ54135	YHQ60140
Frequency(Khz)	40	40	40	40	40	40	40	40	40
Power(W)	600W	900W	0-1200W	0-1500W	0-1800W	0-2100W	0-2400W	0-2700W	0-3000W
Transducers(PCS)	12	18	24	30	36	42	48	54	60
Length(mm)	300	450	600	750	900	1050	1200	1350	1400
Diameter(mm)	140	140	140	140	140	140	140	140	140

Series	Ultrasonic vibration plate series						
Model	YK0618	YK1225	YK1830	YK2435	YK3042	YK3650	YK4860
Unit size	280*180*100	360*250*100	410*300*100	500*350*100	550*420*100	620*500*100	750*600*100
Frequency(Khz)	28/40	28/40	28/40	28/40	28/40	28/40	28/40
Transducers/Power (PCS/W)	6/300	12/600	18/900	24/1200	30/1500	36/1800	48/2400
Generator	External	External	External	External	External	External	External
Max power(W)	300	600	900	1200	1500	1800	2400

## Contact us

For more products, please visit:

**Official Website: [www.yunyisonic.com](http://www.yunyisonic.com)**

**Manufacturer: Yunyisonic Shenzhen Co., Ltd.**

Production Address: 1, Bitou 3 Industrial Pk 4 Rd, Baoan, Shenzhen, Guangdong Province, China

T :+86 18938665253

E: [sales\\_dean@yunyisonic.com](mailto:sales_dean@yunyisonic.com)

**CUSTOMER SERVICE: [yunyisonic@yunyisonic.com](mailto:yunyisonic@yunyisonic.com)**